


Automatic back-flushing filter AutoFilt® RF4

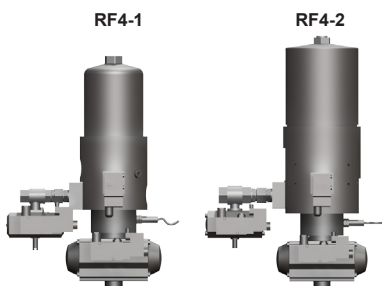

Specifications	
Nominal size:	G1" – G 1½"
Q _{max} :	220 l/min
p _{max} :	16 bar
Filtration ratings:	30 – 1000 µm

1. GENERAL

Product description

- Self-cleaning automatic filter
- Separation of solid particles from low viscosity fluids
- Available as a fully automatic or manual filter variant

Filter element technology

- Conical filter elements
- Wedge wire: 30 to 1000 µm
- SuperMesh wire mesh, sintered: 25 to 60 µm

Product advantages

- Fully automatic function
- Compact design
- Continuous flow of filtrate even during back-flushing
- Maximum utilisation of the filter area
- Full filtration performance after back-flushing
- Ready-to-operate unit
- Low maintenance costs
- Low operating costs

Technical data – standard models

Size ¹⁾	Pressure range [bar]	Connection Inlet / outlet	Connection, back-flush line	Weight ²⁾ [kg]	Volume [l]	No. of filter elements	Filter area [cm ²]	Back-flush volume [l] ³⁾
RF4-1	6	G1"	G ½"	13	2.5	4 x KM	548	4
RF4-1	16	G1"	G ½"	15	2.5	4 x KM	548	4
RF4-2	6	G1 ½"	G ¾"	32	3.7	4 x KN	1420	13
RF4-2	16	G1 ½"	G ¾"	63	3.7	4 x KN	1420	13

Legend

¹⁾ T_{s max} for all AutoFilt® RF4: 80°C

²⁾ Refers to EPT version

³⁾ Back-flush volume with a valve opening time of 1.5 seconds with a pressure difference of 1.5 bar between the filtrate line and the back-flush line

2. FUNCTION

FILTRATION



- The fluid to be filtered flows through the filter elements of the back-flushing filter, passing from the inside to the outside
- During this process, the particles deposit on the smooth inside of the filter element surface
- As the level of contamination increases, the differential pressure between the dirty and the clean side of the filter increases
- When the pressure drop reaches the pre-set differential pressure trigger point, back-flushing starts automatically

TRIGGERING BACK-FLUSHING

- Automatic: automatic back-flushing is triggered when the pre-set differential pressure trigger point is exceeded
- Manual: when the visual clogging indicator is triggered

BACK-FLUSHING OF THE FILTER ELEMENTS – BACK-FLUSHING CYCLE

- The rotary drive rotates the filter element mounting plate, along with the filter elements, into position so that a clogged filter element is located above a flush opening
- The back-flushing valve is opened
- The pressure drop between the filtrate side and the back-flush line flushes a small amount of the filtrate back through the filter element to be cleaned
- The contaminant particles deposited on the inside of the filter elements are loosened and flushed into the back-flush line via the flushing arm
- Once the “back-flush time per filter element” has elapsed, the back-flushing valve is closed
- In this way, all the filter elements are back-flushed, one after the other
- A back-flushing cycle is complete once all the filter elements have been cleaned
- In the AutoFilt® RF4 with manual back-flushing, the filter element mounting plate is turned along with the filter elements, and the back-flushing valve is opened manually
- The flow of filtrate is not interrupted during back-flushing

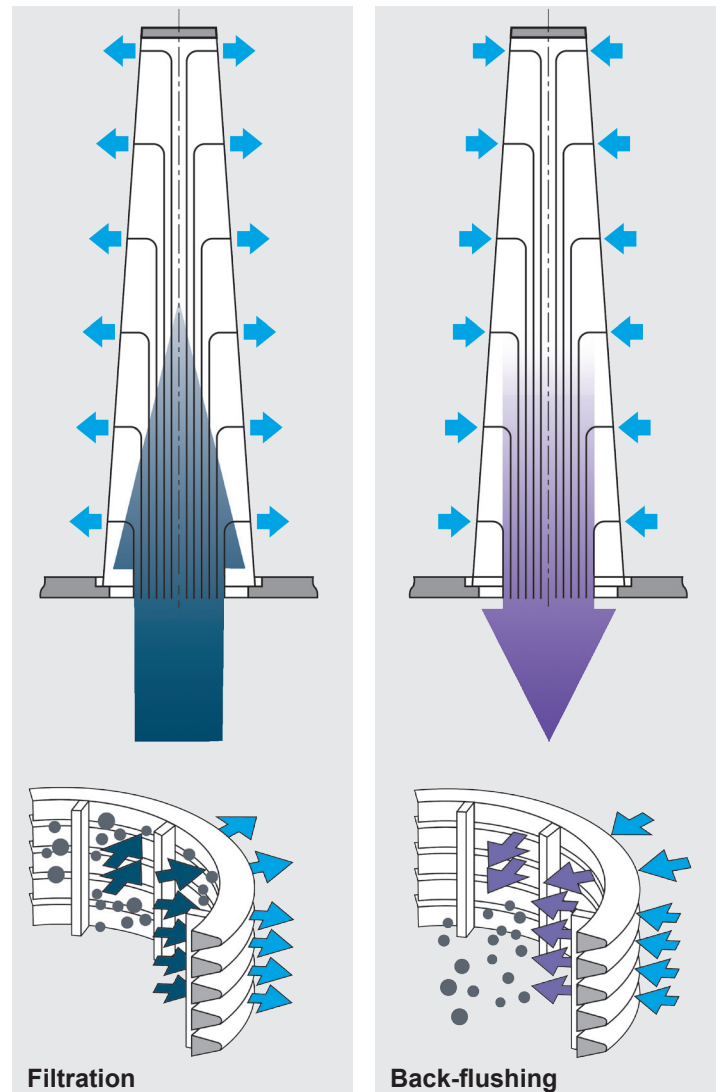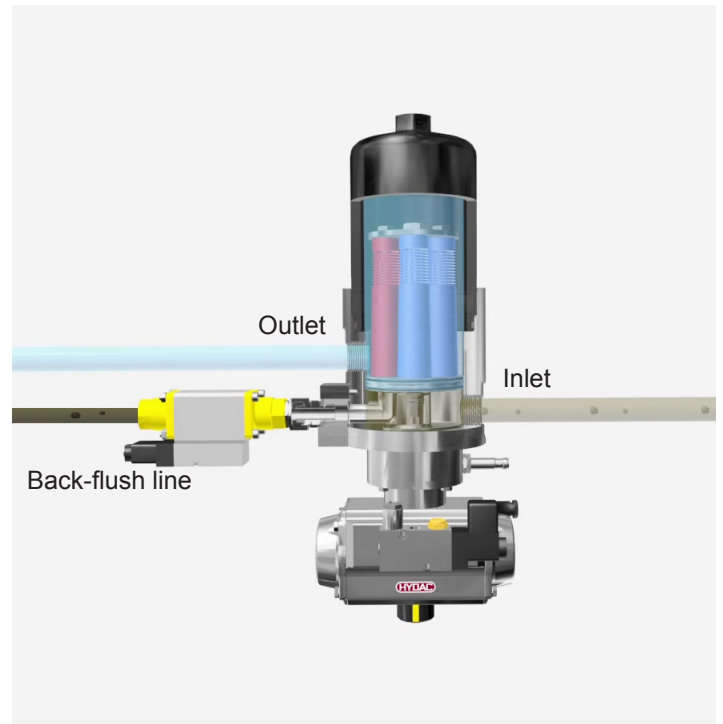

3. SPECIAL FEATURES

FILTER ELEMENT TECHNOLOGY

Conical filter elements


Robust wedge wire or SuperMesh filter elements made from stainless steel are used in the HYDAC AutoFilt® RF4 automatic back-flushing filter. The conical shape of the filter elements provides maximum efficiency during filtration and optimum effectiveness during back-flushing.

SuperFlush non-stick coating


For waste-water treatment applications, the filter elements can also be given a special non-stick coating (SuperFlush).

Advantages of the SuperFlush coating:


- Unique coating technology
- Available for conical filter elements
- Prevents particle build-up on the filter element surface
- Gel-like particles do not adhere to the filter element surface
- Reduces biofouling
- Increases the service life
- Increases effectiveness



Wedge wire

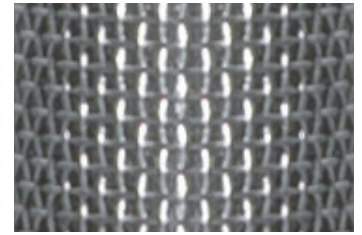

SuperMesh – Wire mesh, sintered, with or without support structure

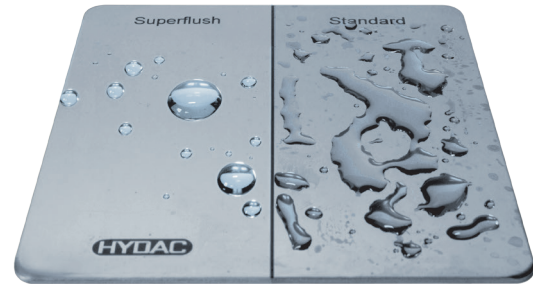

With | Without SuperFlush
Non-stick coating for filter elements

ISOKINETIC FILTRATION AND BACK-FLUSHING

The conical shape and alignment of the filter elements allow uniform flow, resulting in a low pressure drop and effective cleaning of the filter elements.

Advantages:


- Fewer back-flushing cycles
- Lower back-flushing losses

PULSE-AIDED BACK-FLUSHING

In the EPT control types, the filter element to be back-flushed remains in the flushing position for only a few seconds. Rapid opening of the back-flushing valve generates a pressure surge in the filter element openings, providing an additional cleaning effect to the back-flushing process.

SMALL BACK-FLUSH VOLUMES DUE TO CYCLIC CONTROL

In the EPT control types, the back-flushing valve opens and closes during back-flushing of each filter element.

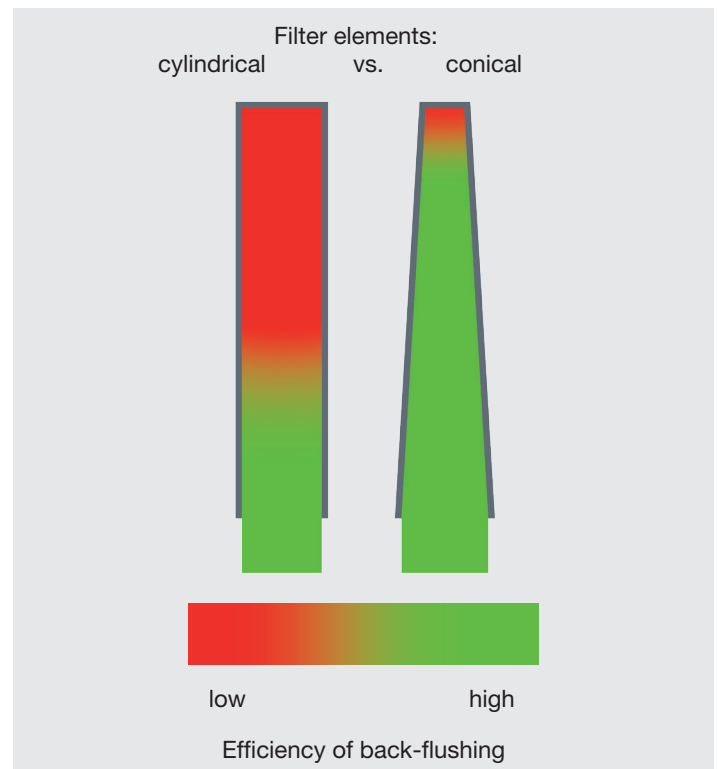

4. FILTER CALCULATION*

CHECKLIST, FILTER CALCULATION

Step 1: Checking the prerequisites

- The determining factor for operating the AutoFilt® RF4 is the presence of a pressure difference of at least 1.5 bar** between the filter outlet and the back-flush line
- This minimum pressure difference is vital for the filter operation
- Application data is determined using filter questionnaires
- The flow velocity of 4 m/s at the filter inlet should not be exceeded
- The maximum permitted operating temperature for every AutoFilt® RF4 is 80°C
- The flow must not drop below the minimum flow rate of 40 l/min

Step 2: Filter sizing

- Determined on the basis of the pressure drop curves and, specially for cooling lubricant emulsion applications, on the basis of the calculation table
- The initial pressure difference (Δp) when the filter is in a clean condition must not exceed 0.2 bar
- The pressure drop curve applies to filtration ratings of 100 to 1000 μm wedge wire and to 25 μm / 40 μm and 60 μm SuperMesh filter elements
- The flow velocity of 4 m/s at the filter inlet should not be exceeded

Step 3: Calculation tables

The calculation tables form an important decision-making basis for selection of the AutoFilt® RF4.

- In particular, the higher contamination load in the cooling lubricant emulsion applications requires that the filter be calculated more generously
- Validity of the tables for emulsions and oils up to a viscosity of 15 mm²/s

CALCULATION TABLES

WATER APPLICATIONS

Fluid	Filter size / max. flow rate [l/min]	
	RF4-1	RF4-2
Water	120	220

The flow rate ranges indicated apply to filtration ratings $\geq 100 \mu\text{m}$

COOLING LUBRICANT EMULSIONS

Applications only following consultation with our Head Office

Conditions for correct performance in standard areas of application	
Filtration rating	$\geq 100 \mu\text{m}$
Pre-filtration	$< 1000 \mu\text{m}$
Contamination content	$< 120 \text{ mg/l}$
Viscosity	$< 15 \text{ cSt}$

Fluid	Type of contamination	Machining	Max. flow rate [l/min]	
			RF4-1	RF4-2
Emulsion	Aluminium	<ul style="list-style-type: none"> • Milling • Boring • Turning 	100	220
	Cast iron		70	180
	Carbon steel		80	200
	Stainless steel		80	200


- The flow rate ranges indicated apply to filtration ratings $\geq 100 \mu\text{m}$ and a maximum contamination content of 120 mg/l
- Validity of the tables for emulsions and oils up to a viscosity of 15 mm²/s
- Our Head Office must be consulted for applications involving compacted graphite iron, grinding, honing and fluids with a viscosity greater than 15 mm²/s

** For diverse cooling lubricant applications, the filtrate pressure must be adjusted to suit the particular application.


* Please contact our Head Office if you have any queries regarding the filter calculation

PRESSURE DROP CURVES

The pressure drop curves apply to water and fluids with a similar viscosity

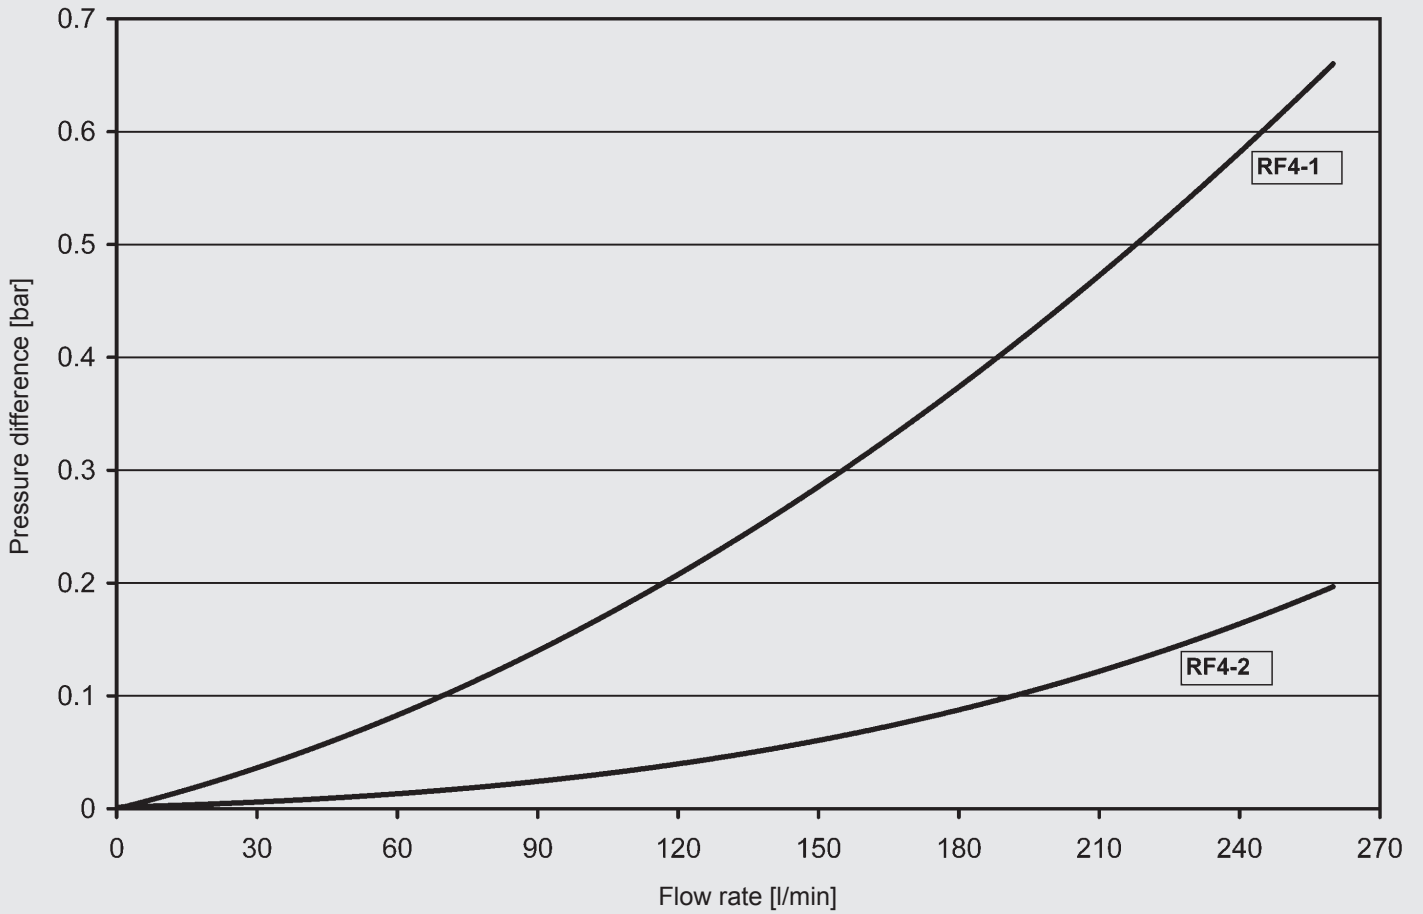

CIRCUIT DIAGRAM

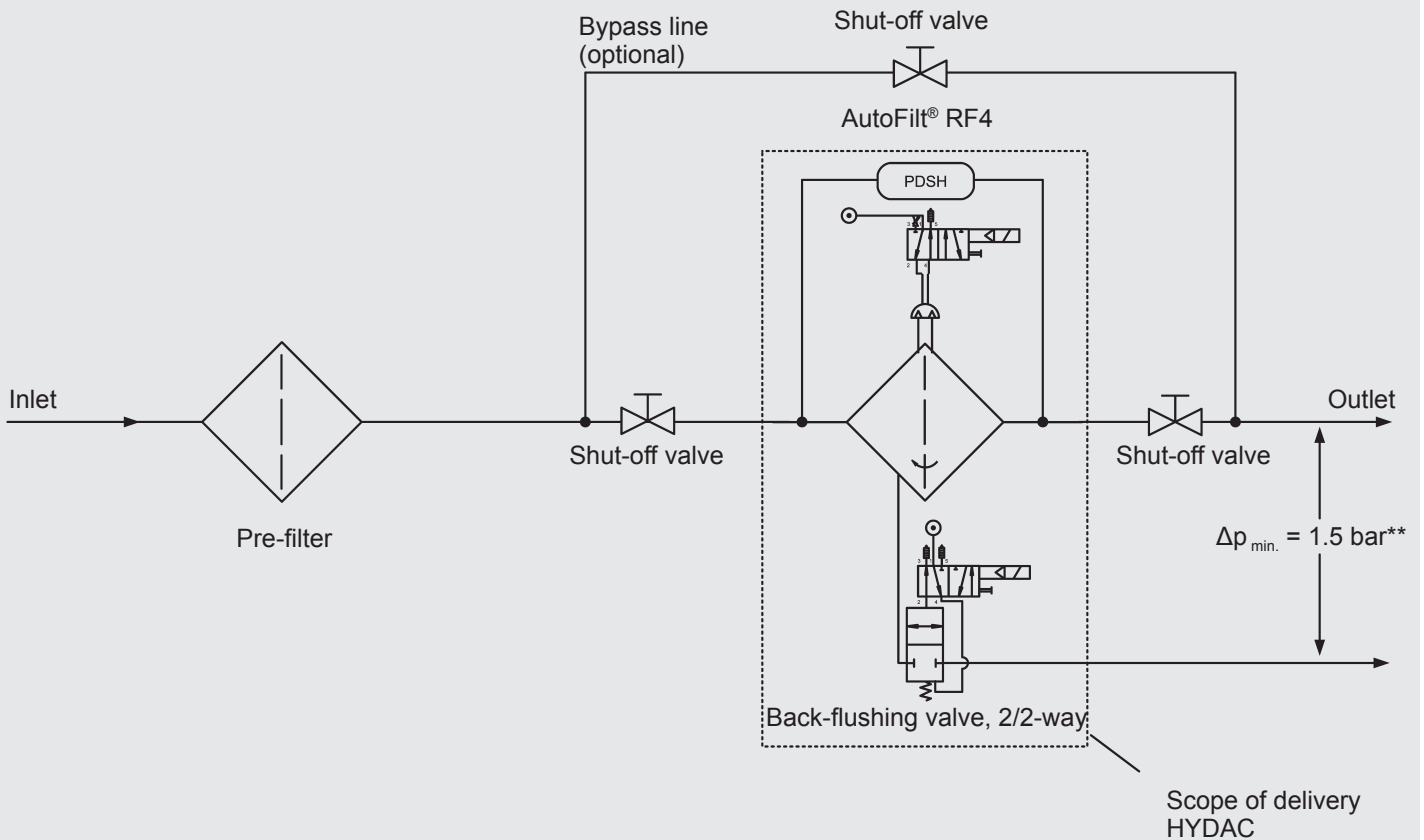

** For diverse cooling lubricant applications, the filtrate pressure must be adjusted to suit the particular application.

5. FILTER CONFIGURATION*

	Standard	Optional
Types of control	<ul style="list-style-type: none"> • EPT: electro-pneumatic cyclic control • ET: electrical cyclic control (electrical only) • M: manual 	Customised special solutions
Connection voltages	<ul style="list-style-type: none"> • 230 V AC main voltage • 230 V AC or 24 V DC control voltage • For ET control variants only: control voltage 24 V DC, drive 3 x 400 V / N / PE, 50 Hz 	Special voltages
Electrical protection classes	IP65	
Housing materials (combinations)	<ul style="list-style-type: none"> • Aluminium, anodised • Stainless steel: 1.4571 or similar (Group 316) • Carbon steel, nickel-plated 	
Material of internal parts	<ul style="list-style-type: none"> • Stainless steel: 1.4301 or similar (Group 304) 	
Back-flushing valve	<ul style="list-style-type: none"> • Coaxial valve • Stainless steel ball valve • Ball valve, brass, nickel-plated 	
Filter elements	<p>SuperMesh filter elements:</p> <ul style="list-style-type: none"> • SuperMesh wire mesh, sintered, with or without support structure: 1.4401 or similar (Group 316) • Nominal filtration rating: 30 – 60 µm <p>Wedge wire:</p> <ul style="list-style-type: none"> • Robust wedge wire • Stainless steel: 1.4435 or similar (Group 316) • Nominal filtration rating: 30 – 1000 µm 	<ul style="list-style-type: none"> • SuperFlush non-stick coating for filter elements • Filter elements with solenoid technology
Differential pressure monitoring	<ul style="list-style-type: none"> • Differential pressure switch with or without setting options 	
Pressure ranges	<ul style="list-style-type: none"> • 6 bar (stainless steel version only) • 16 bar 	25 bar
Documentation	<ul style="list-style-type: none"> • Operating and maintenance instructions 	<ul style="list-style-type: none"> • Material certificates according to EN 10204, 3.1 for the pressurised components in contact with media (stainless steel version only) • Manufacturer inspection certificate according to DIN 55350, Part 18 "M" for final inspection and pressure testing

* Other versions and customised special solutions following consultation with our Head Office.

6. MODEL CODE

MODEL CODE AutoFilt® RF4

RF4-2 - EPT 2 - NN E - CO - 3 - 16 - 1 / SKNS100 - 1234567

Filter type

RF4-1 = AutoFilt® RF4, size 1
RF4-2 = AutoFilt® RF4, size 2

Control

M = manual
EPT = electro-pneumatic control (incl. pneumatic drive)
ET = electrical control

Control type / connection voltage

For EPT control only:

0 = without control, without solenoid valve
1 = with S7 control, 1 x 230 V / N / PE 50 Hz, solenoid valve 230 V AC
2 = with S7 control, 1 x 230 V / N / PE 50 Hz, solenoid valve 24 V DC
2M = with S7 control, 1 x 230 V / N / PE 50 Hz, solenoid valve 24 V DC / M12x1 male connector
3 = without control, with solenoid valve 230 V AC
4 = without control, with solenoid valve 24 V DC
4M = without control, with solenoid valve 24 V DC / M12x1 male connector
5A = with AutoFilt® Control Unit ACU control, 1 x 230 V/N/PE 50 Hz
5C = with AutoFilt® Control Unit ACU control, 3 x 380–420 V / N / PE 50/60 Hz
5D = with AutoFilt® Control Unit ACU control, 3 x 380–420 V / x / PE 50/60 Hz

For ET control only:

0A = without control, drive 1 x 230 V / N / PE, 50 Hz
Back-flushing valve 1 x 230 V / N / PE, 40–60 Hz
Sensor system 24 V DC
0C = without control, drive 3 x 380–420 V / x / PE, 50/60 Hz
Back-flushing valve 1 x 230 V / N / PE, 40–60 Hz
Sensor system 24 V DC
1A = with S7 control, 1 x 230 V / N / PE, 50 Hz
1C = with S7 control, 3 x 380–420 V / N / PE, 50/60 Hz
1D = with S7 control, 3 x 380–420 V / x / PE, 50/60 Hz
2A = with AutoFilt® Control Unit ACU control, 1 x 230 V / N / PE, 50 Hz
2C = with AutoFilt® Control Unit ACU control, 3 x 380–420 V / N / PE, 50/60 Hz
2D = with AutoFilt® Control Unit ACU control, 3 x 380–420 V / x / PE, 50/60 Hz
Other voltages on request!

Materials

Bottom filter section	Top filter section	Note
AA = aluminium ALMG3	aluminium ALMG3	Only RF4-1, 16 bar
NN = carbon steel, nickel-plated	carbon steel, nickel-plated	Only RF4-2, 16 bar
EE = stainless steel	stainless steel: 1.4571 or similar (Group 316)	RF4-1/2, 16 bar

Internal parts

E = stainless steel: 1.4301 or similar (Group 304)

Back-flushing valve

0 = without back-flushing valve
CO = coaxial valve, brass
CON = coaxial valve, zinc-plated steel (only on request!)
COE = coaxial valve, stainless steel (only on request!)
KN = ball valve, nickel-plated brass (only on M or EPT control variants)
KE = ball valve, stainless steel (only on M or EPT control variants) (only on request!)

Differential pressure monitoring

0 = without differential pressure monitoring
1 = fixed value: 0.5 bar, type DS 32, normally open contact (n. o.)
2 = adjustable: 0.1–1 bar, type DS 31, normally open contact (n. o.)
3 = fixed value: 0.5 bar, type DS 32, normally closed contact (n. c.)
4 = adjustable: 0.1–1 bar, type DS 31, normally closed contact (n. c.)
5 = Visual clogging indicator (for manual version only)
7 = fixed value 0.5 bar, type VL 1 GW (aluminium), normally closed contact (n. c.)
8 = fixed value 0.5 bar, type PVL 1 GW (1.4301), normally closed contact (n. c.)
9 = 2 x HDA 4700 stainless steel (4–20 mA), standard in combination with AutoFilt® Control Unit ACU control

Pressure range

06 = 6 bar (housing fastened with clamp), only for housings in stainless steel design
16 = 16 bar (top filter section threaded)
25 = 25 bar, only for RF4-1 (only on request!)

Modification number

1 = the latest version is always supplied

Filter elements / filtration rating

M = "M" added in front for solenoid technology
S = "S" added in front for SuperFlush

For RF4-1:

KMS = wedge wire 30 µm to 1000 µm
KMD = SuperMesh 25 µm / 40 µm / 60 µm; other filtration ratings on request

For RF4-2:


KNS = wedge wire 30 µm to 1000 µm
KND = SuperMesh 25 µm / 40 µm / 60 µm; other filtration ratings on request

Drawing number

For special designs


7. DIMENSIONS

RF4-1/2 Coax

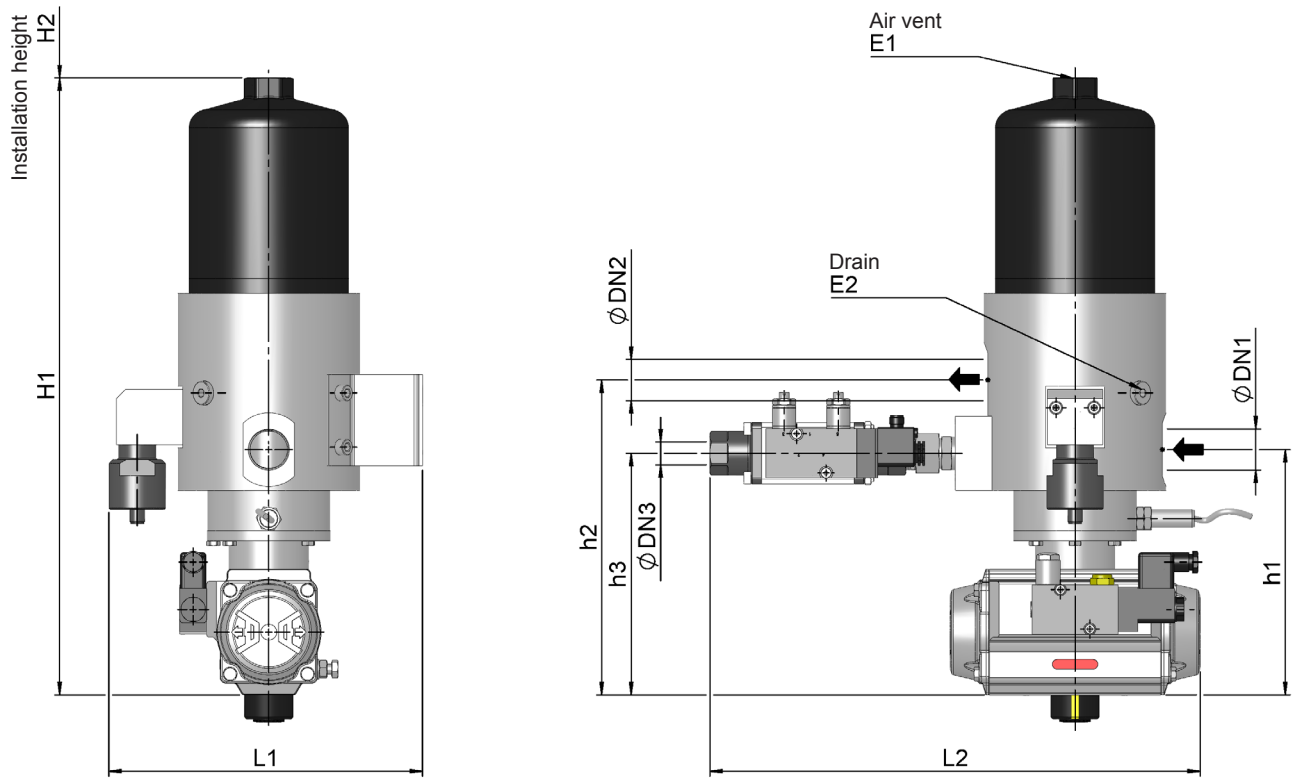



Size	DN1	DN2	DN3	h1	h2	h3	H1	H2	L1	L2	E1	E2
RF4-1	G1	G1	G1/2	199	256	196	501	110	255	399	G1/2	G1/4
RF4-2	G1 1/2	G1 1/2	G3/4	206	282	210	572	106	342	452	G1/2	G1/4

RF4-1/2 electrical

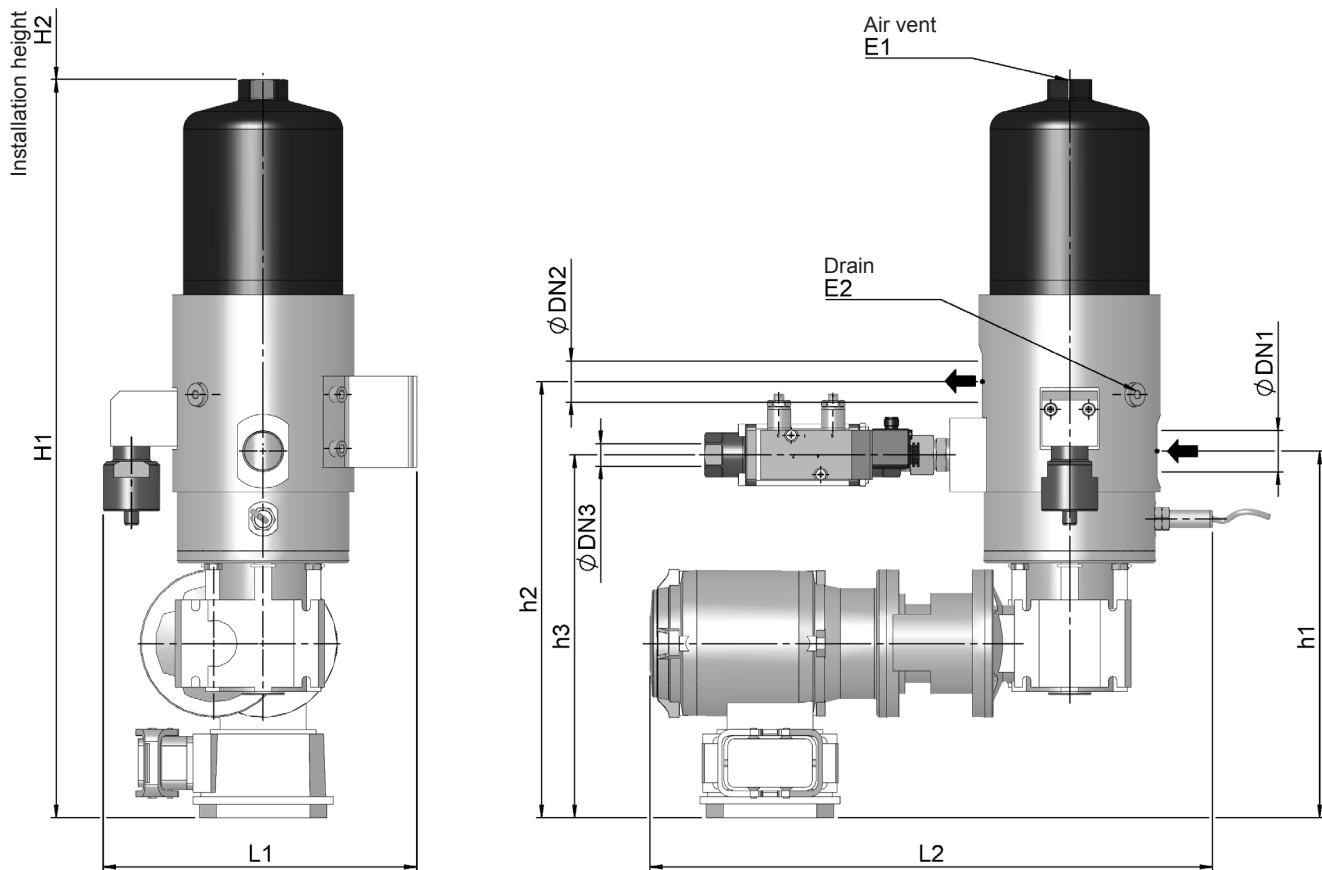

Size	DN1	DN2	DN3	h1	h2	h3	H1	H2	L1	L2	E1	E2
RF4-1	G1	G1	G1/2	298	355	295	600	110	255	437	G1/2	G1/4
RF4-2	G1 1/2	G1 1/2	G3/4	304	379	307	672	206	342	458	G1/2	G1/4

RF4-1/2 manual

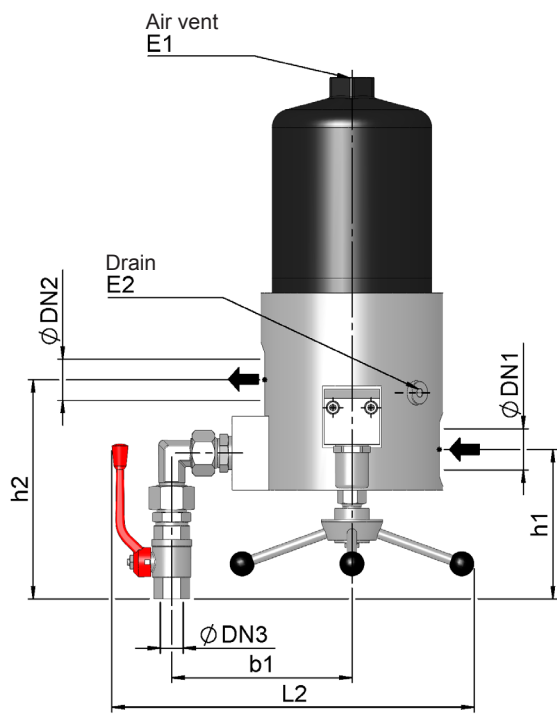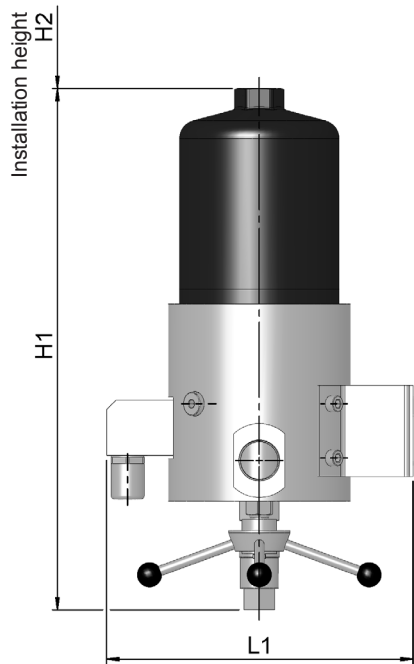

Size	DN1	DN2	DN3	h1	h2	h3	H1	H2	L1	L2	E1	E2
RF4-1	G1	G1	G1/2	121	178	147	423	110	249	294	G1/2	G1/4
RF4-2	G1 1/2	G1 1/2	G3/4	115	190	178	480	206	336	337	G1/2	G1/4

The dimensions indicated have ± 10 mm tolerances.
Subject to technical modifications.

E Engineering
Partner

S Systems
Integrator

V Value-Added
Distributor

248-373-1600 • morrell-group.com • orders@morrellinc.com

MI • IN • IL • OH • ON, CAN

NOTE

The information in this brochure relates to the operating conditions and applications described.

For applications and/or operating conditions not described, please contact the relevant technical department.

Subject to technical modifications.

MorrellGroup 
Evolution in Controls

HYDAC Process Technology GmbH

Am Wrangelflöz 1

D-66538 Neunkirchen

Tel.: +49 (0)6897 - 509-1241

Fax: +49 (0)6897 - 509-1278

Internet: www.hydac.com

E-mail: prozess-technik@hydac.com